

(19) 日本国特許庁 (J P)

(12) 公開特許公報 (A)

(11) 特許出願公開番号

特開平11-185018

(43) 公開日 平成11年(1999)7月9日

(51) Int.Cl. <sup>8</sup>	識別記号	F I	
G 0 6 T 1/00		G 0 6 F 15/62	3 8 0
7/00		H 0 4 N 5/262	
7/60		G 0 6 F 15/64	3 3 0
H 0 4 N 5/262		15/66	4 5 0
		15/70	3 3 0 P
審査請求 未請求 請求項の数 3 O L (全 11 頁) 最終頁に続く			

(21) 出願番号 特願平9-355199  
(22) 出願日 平成9年(1997)12月24日


(71) 出願人 000000376  
オリンパス光学工業株式会社  
東京都渋谷区幡ヶ谷2丁目43番2号  
(72) 発明者 日暮 正樹  
東京都渋谷区幡ヶ谷2丁目43番2号 オリ  
ンパス光学工業株式会社内  
(74) 代理人 弁理士 鈴江 武彦 (外4名)

## (54) 【発明の名称】 画像処理装置

## (57) 【要約】

【課題】同一被写体が撮影された複数の画像で被写体に位置ずれがあると、加算時にずれ等が発生し、ダイナミックレンジ圧縮処理や被写界深度拡大処理による利点を十分に生かすことができなかった。

【解決手段】本発明は、まず入力された複数の画像のうち1枚が選択され、この画像が複数の領域に分割されて、その分割領域の特徴量から特徴点を設定し、その特徴点の座標位置を記憶する。その特徴点の座標に基づき、選択されなかった別の各入力画像に対して、対応する点を探索し、その対応点の座標位置を抽出して、特徴点の座標と対応点座標から画像間の位置関係（平行移動量、回転角度）を算出し、一方または両方の画像を補正して被写体が合致するように位置合わせ補正を行った後、ダイナミックレンジ圧縮処理や被写界深度拡大処理等を施す画像処理装置である。

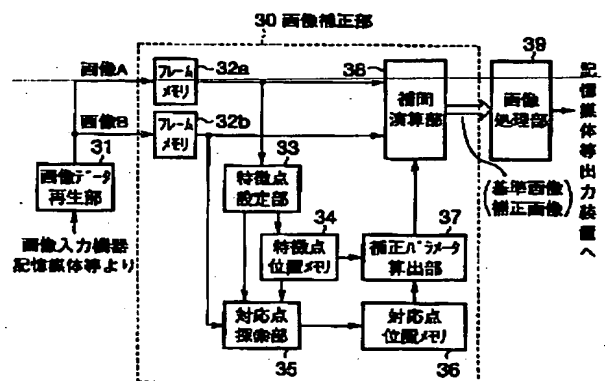

(2)

1

## 【特許請求の範囲】

【請求項1】 ほぼ同一の構図を異なる撮影条件で撮影した複数の画像間の位置合わせ処理を行う画像処理装置において、

入力した画像の少なくとも1つの画像を複数の分割領域に分割し、前記各分割領域内に画像の特徴を表す特徴点の探索領域を設ける探索領域設定手段と、

前記各特徴点の探索領域から前記画像の特徴量に基づいて、前記構図内の被写体の特徴的な位置情報を前記分割画像の各分割領域に対する座標に関連させて抽出する第1の位置情報抽出手段と、

前記分割された画像以外の前記入力画像のそれぞれに対して、前記特徴的な位置情報に対応する点を探索し、得られた対応する点をその画像に対する座標に関連させた位置情報として抽出する第2の位置情報抽出手段と、抽出された前記特徴的な位置情報及び前記対応する点の位置情報の各座標間のずれに基づく補正パラメータを検出する補正パラメータ検出手段と、

検出された補正パラメータに基づき、各画像の被写体位置が一致するように画像を補正する画像補正手段と、を具備することを特徴とする画像処理装置。

【請求項2】 前記第1及び第2の位置情報抽出手段により抽出される位置情報は、前記画像内を移動する物体が検出された分割領域の座標に関連する位置情報を除外した位置情報であることを特徴とする請求項1に記載の画像処理装置。

【請求項3】 前記第1及び第2の位置情報抽出手段により抽出される位置情報は、前記画像内の各分割領域に対して、直交変換したときの高周波成分の割合、飽和した画素の割合、画素値の平均値、最大及び最小の画素値の差、コントラストのいずれかの値を基準として、前記入力した画像から所望の分割領域に対する座標関連位置情報を抽出することを特徴とする請求項2に記載の画像処理装置。

## 【発明の詳細な説明】

## 【0001】

【発明の属する技術分野】本発明は、同一の被写体を異なる撮影条件で撮影した複数の画像から入力機器のダイナミックレンジや被写界深度を超えた画像を合成する装置に係り、特に各画像を重ね合わせた際に被写体が一

## 【0002】

【従来の技術】一般に、同一の被写体を異なる露出で撮影した複数の画像を合成することで、CCD (Charge Coupled Device) 等の撮像素子の固有のダイナミックレンジ以上の範囲のダイナミックレンジを有する画像を作成する画像処理技術 (例えば、特開昭63-232591号公報) や、同一の被写体を異なる焦点位置で撮影した複数の画像を合成し、入力光学系の被写界深度よりも

2

深い被写界深度を有する画像を作成する画像処理技術 (特開平1-309478号公報) がある。

【0003】この広ダイナミックレンジ画像を作成する技術は、図12(a)に示す構成で実現される。図示される画像A、Bは、それぞれ露出を変えて撮影した画像であり、撮像素子に入射する入射光量と、画像入力機器で得られる画像の信号値との関係は、図12(b)の“[A]長時間露出”、“[B]短時間露出”のようになる。

【0004】加算器11では画像A、Bの画素値が加算され、図12(b)に“[C]加算信号”として示す値がフレームメモリ12に記憶される。この“[C]加算信号”の形状は、2枚の画像の露出比で決定されている。線形変換部13では、加算信号値Sから入射光量Iを推定し、マトリクス回路15ではR、B、G各色の信号値から輝度信号値Yに変換する。

【0005】そして輝度圧縮部16では、推定入射光量が既定の階調数に収まるように輝度値を圧縮し、圧縮された輝度信号値Y'が出力される。除算器17では、Y'/Yが計算され、線形変換部16の出力であるR、G、Bそれぞれの信号と乗算器18で掛け合わせられ、結果がフレームメモリ19に格納される。

【0006】この画像処理技術は、複数の画像データを利用して、単に短時間露出画像をトーンカーブ処理した場合に比べて、色再現が良好でノイズの少ない画像を得ることができる。

【0007】また、前述した入力光学系の被写界深度よりも深い被写界深度を有する画像を作成する画像処理技術は、例えば図13に示す構成で実現される。まず、焦点位置を変えて撮影された画像は、加算器21で重み付け加算され、フレームメモリ22に記憶される。焦点位置を変えた画像を焦点位置に応じて重み付け加算すると、画像全体のボケが均一化されることが知られている。

【0008】そこで、回復フィルタ設定回路25では、加算後の画像におけるボケの回復フィルタを決定し、マトリクス演算回路23に出力する。ここで、ボケ回復フィルタの作成方法は、本発明の本質に関わる部分ではないため省略する。マトリクス演算回路23では、加算画像に回復フィルタを作用させ、結果をフレームメモリ24に格納する。この結果、フレームメモリ24に格納された画像は、撮像光学系より被写界深度の深い画像となっている。

## 【0009】

【発明が解決しようとする課題】前述した画像処理技術は、撮影した画像を一旦、画素ごとに加算または重み付け加算したのち、ダイナミックレンジ圧縮処理や回復処理といった一連の処理を行うものであった。そのため、加算の対象となる画像がお互いに位置ずれを起こしていると、加算したときにずれてしまい、正確な結果が得ら

(3)

3

れなかった。

【0010】そのため、ダイナミックレンジ拡大処理の場合は、非破壊読み出しが可能なため、原理的に複数の露出で画像を撮影する間に位置ずれを起こすことの無いCMD (Charge Modulated Device) 素子を使った機器を利用する、また被写界深度拡大処理では、強固なステージが必要といったように、業務用の高価な装置が必要とされた。また、焦点位置を変えて撮影する場合は、焦点位置毎の微妙な倍率の変化も影響する。

【0011】それに対し、一般ユーザーが利用するようなデジタルカメラ、スキャナ、三脚などでは、業務用機器に比べて、精度は期待できない簡易的なものが大半を占めている。従って、前述した画像処理技術の利点を十分に生かすことができなかった。

【0012】例えば、三脚にデジタルカメラを載せて撮影する場合、シャッターを押すときにカメラが動いてしまったり、銀塩カメラで撮影した画像をフィルムスキャナで取り込む場合、フィルムの挿入の仕方により、互いにずれてしまうなどである。

【0013】そこで本発明は、露出や焦点位置など撮影条件が異なる複数の画像間の位置関係を検出し、検出した位置関係を示すパラメータの値によって、正確に画像が重なるように補正する画像処理装置を提供することを目的とする。

【0014】

【課題を解決するための手段】本発明は上記目的を達成するために、ほぼ同一の構図（撮影領域）を異なる撮影条件で撮影した複数の画像間の位置合わせ処理を行う画像処理装置において、入力した画像の少なくとも1つの画像を複数の分割領域に分割し、前記各分割領域内に画像の特徴を表す特徴点の探索領域を設ける探索領域設定手段と、前記各特徴点の探索領域から前記画像の特徴量に基づいて、前記構図内の被写体の特徴的な位置情報を前記分割画像の各分割領域に対する座標に関連させて抽出する第1の位置情報抽出手段と、前記分割された画像以外の前記入力画像のそれぞれに対して、前記特徴的な位置情報に対応する点を探索し、得られた対応する点をその画像に対する座標に関連させた位置情報として抽出する第2の位置情報抽出手段と、抽出された前記特徴的な位置情報及び前記対応する点の位置情報の各座標間のずれに基づく補正パラメータを検出する補正パラメータ抽出手段と、検出された補正パラメータに基づき、各画像の被写体位置が一致するように画像を補正する画像補正手段とを備える画像処理装置を提供する。

【0015】以上のような構成の画像処理装置は、入力された複数の画像のうち1枚が選択され、この画像が複数の領域に分割されて、その分割領域の特徴量から特徴点を設定し、その特徴点の座標位置を記憶する。その特徴点の座標に基づき、選択されなかった別の各入力画像に対して、対応する点を探索し、その対応点の座標位置

4

を抽出して、特徴点の座標と対応点座標から画像間の位置関係（平行移動量、回転角度）を算出し、一方または両方の画像を補正して被写体が合致するように位置合わせ補正を行った後、ダイナミックレンジ圧縮処理や被写界深度拡大処理等を施す。

【0016】

【発明の実施の形態】以下、図面を参照して本発明の実施形態について詳細に説明する。図1には、本発明による第1の実施形態としての画像処理装置の構成例を示し説明する。

【0017】本実施形態において、図示しないデジタルカメラで撮影された画像や銀塩カメラで撮影されスキャナ等で撮り込まれた画像はハードディスクや携帯可能なフロッピーディスク、メモ리카ード等の記憶媒体に記録されている。

【0018】本実施形態は、大別すると、前記ハードディスクやフロッピーディスク、メモ리카ード等に記録されている画像を読み出し、伸長等の処理を施す画像データ再生部31と、画像データ再生部31からの入力画像に後述する方法によって補間演算を施し画像の被写体の位置関係を補正する画像補正部30と、前記画像補正部30により位置関係が補正された画像に対して、前述したダイナミックレンジ拡大や被写界深度拡大を実行する画像合成部39とで構成される。

【0019】また前記画像補正部30は、画像データ再生部31で伸長処理が行われた画像データを一時的に記憶するフレームメモリ32と、選択された1つの画像に対して後述する複数の特徴点（座標）を設定する特徴点設定部33と、その特徴点座標を記憶する特徴点位置メモリ34と、特徴点座標及びテンプレートとして切り出された特徴点周辺の画像データから別の画像中において対応する点を探索する対応点探索部35と、得られた対応点座標位置を記憶する対応点位置メモリ36と、特徴点座標と対応点座標から2枚の画像間の位置関係（平行移動量、回転角度）を算出する補正パラメータ算出部37と、入力された位置関係から、一方または両方の画像を補正して画像合成部39に出力する補間演算部38とで構成される。

【0020】このように構成された本実施形態の画像処理方法においては、前記ハードディスクやメモ리카ード等から読み出された画像が画像データ再生部31で伸長等の処理が施されて、画像補正部30のフレームメモリ32に記憶される。ここで、画像データ再生部31から出力されるデータは、画像の画素値だけではなく、画像サイズや色数やカラーマップ等の付加的なデータも含むものとする。

【0021】次に入力画像のうち1枚が選択され（ここでは画像Aとする）、特徴点設定部33に入力される。この特徴点設定部33では、後述する方法で複数の特徴点（座標）を設定し、特徴点座標が特徴点位置メモリ3

50

(4)

5

4に入力される。設定された特徴点座標が対応点探索部35にも入力され、同時に特徴点周辺の画像データがテンプレートとして切り出され、対応点探索部35に入力される。

【0022】対応点探索部35では、特徴点設定部33に入力された画像とは別の画像中で（ここでは画像B）、入力されたテンプレートに対応する点を探索する。対応点を探索する方法は後述する。

【0023】その結果、対応点座標位置が対応点位置メモリ36に出力される。補正パラメータ算出部37では、特徴点位置メモリ34の特徴点座標と、対応点位置メモリ36の対応点座標を読み出し、2枚の画像間の位置関係（平行移動量、回転角度）を算出する。そして補間演算部38では、入力された位置関係から、一方または両方の画像を補正して画像合成部39に出力する。

【0024】この画像合成部39では、前述したダイナミックレンジ拡大処理や被写界深度拡大処理を実行するが、対象とする画像が前段の画像補正部30で位置あわせが行われた画像であるため、当然正確に重ね合わされた画像が結果画像として得られる。

【0025】図2には、前記特徴点設定部33の構成を示し説明する。この特徴点設定部33では、複数の特徴点位置を決定するが、画像の一部に多くの特徴点が集中した場合、それ以外の部分で位置あわせの誤差が大きくなる場合がある。そこで領域分割部41では、特徴点が画像中で適当に散らばるようにするため、画像を複数の領域に分割し、さらにその内部に特徴点探索領域を設定する。ここで、全体を均等に分割した例を図3(a)に示す。

【0026】この領域中でテンプレートの候補となる小領域を移動させ、特徴量が最大となる位置を特徴点の1つとして出力する。ただし、全体を探索すると非常に処理時間がかかってしまうため、図3(a)のように分割した領域より小さな特徴点探索領域を設定することが望\*

$$T < T_{th}$$

のように、ある規定値 $T_{th}$ より小さい場合は、信頼性が低いとして採用しない。例えば、図3(b)における空の部分のように、画素値の変化が小さい部分では一般に後述するマッチングの精度が落ちるが、本発明の方法では(2)式のような値 $T$ をもつ特徴点候補位置には特徴点が設定されず、位置関係パラメータの精度低下を防ぐことができる。

【0032】図4は、対応点探索部35の構成を説明する図である。サーチエリア設定部51では、特徴点設定部33から読み出した特徴点座標を基準に、対応点を探索する領域の位置と大きさを設定する。相関演算部52では、サーチエリア設定部51で設定されたサーチエリア内の情報に基づいて、特徴点設定部33から入力されたテンプレートと同じ大きさを持つように対応点候補位置周囲の画像データをフレームメモリ32b中の画像デ

6

\*ましい。この特徴点探索領域の大きさは、例えば画像サイズの5%というように、画像サイズを基準にして予め決めておく。または、分割された小領域の大きさを基準としても構わない。

【0027】次にテンプレート位置決定部42では、特徴点探索領域内のテンプレート候補位置を決定し、その位置に基づいてテンプレート抽出部43でテンプレート候補内の画像データを切り出す。このとき、テンプレート位置決定部42では、特徴探索領域内で、テンプレート候補の位置を順に移動する。

【0028】位置的に近いテンプレート候補の特徴量変化は、あまり大きくない場合もあるので、このような場合はテンプレート候補の位置を1画素毎ずらすのではなく、数画素おきにずらすこともでき、結果的に計算量を削減することができる。

【0029】特徴量算出部44では、テンプレート候補の特徴量を計算し、特徴量判定部45で特徴量が最大となるテンプレート位置を決定する。テンプレート抽出部46では、特徴量が最大となった位置周辺のデータを、テンプレートとして抽出する。このテンプレート抽出部46は、テンプレート抽出部43がその役割を兼ねても構わない。この特徴量としては、例えば(1)式に示すような画素値分散を使うことができる。

【0030】

【数1】

$$T = \sum_i |p_i - A| \quad (1)$$

ここで、 $a_i$ は画素値、 $A$ はテンプレート候補内の画素値平均であり、テンプレート候補内全体に対して和を取る。また、具体的な式は挙げないが、2次の画素値分散や、エッジ検出結果も特徴量として好ましい値である。このとき、前記値 $T$ が次式、

【0031】

【数2】

(2)

ータから切り出し、特徴点設定部33から入力されたテンプレートデータとの相関値を計算する。

【0033】相関値判定部53では、テンプレート抽出部46で抽出されたテンプレートと最も相関が高い位置を判定し、結果を対応点位置として対応点位置メモリ36に出力する。

【0034】このとき、一般に対応点候補は、1画素毎に移動して相関値を求めるが、画素以下の精度で対応点位置を検出するために、周囲の相関値を参照して補間により対応点位置を決定しても良い。その相関値としては、次の(3)式に示す差分の絶対値和、(4)式に示す相互相関、(5)式に示す正規化相互相関等を使うことができる。

【0035】

【数3】

(5)

$$E = \sum_i |a_i - b_i| \quad (3)$$

$$E = \sum_i (a_i - A) \cdot (b_i - B) \quad (4)$$

$$E = \frac{\sum_i (a_i - A) \cdot (b_i - B)}{\sigma_A \cdot \sigma_B} \quad (5)$$

ここで、 $b_i$ 、 $B$ は、画像Bのサーチエリア内で移動する小領域内の画素値とその平均であり、 $\sigma_A$ 、 $\sigma_B$ はテンプレートデータの標準偏差であり、 $\sigma_A^2$ 、 $\sigma_B^2$ がその分散値となる。

【0036】前記(2)～(4)式を計算する場合、ある代表色のみについて計算すれば、高速に処理することができる。また、 $R$ 、 $G$ 、 $B$ 各色の相関値を加算して対応点を探索すればより高精度に対応点検索を行うことが\*

$$A_c = M \cdot \cos \theta = (\overline{xX} + \overline{yY} - \overline{x}\overline{X} - \overline{y}\overline{Y}) / (\sigma_x^2 - \sigma_y^2)$$

$$A_s = M \cdot \sin \theta = (\overline{xy} - \overline{yX} + \overline{yX} - \overline{xy}) / (\sigma_x^2 - \sigma_y^2)$$

$$s_x = \overline{x} - M \cdot (\overline{x} \cos \theta - \overline{y} \sin \theta)$$

$$s_y = \overline{y} - M \cdot (\overline{x} \sin \theta + \overline{y} \cos \theta)$$

$$\overline{x} = \frac{1}{N} \cdot \sum_i x_i, \overline{y} = \frac{1}{N} \cdot \sum_i y_i, \overline{xX} = \frac{1}{N} \cdot \sum_i x_i \cdot X_i, \overline{yY} = \frac{1}{N} \cdot \sum_i y_i \cdot Y_i$$

$$\overline{xX} = \frac{1}{N} \cdot \sum_i x_i \cdot X_i, \overline{yY} = \frac{1}{N} \cdot \sum_i y_i \cdot Y_i, \quad (7)$$

$$\overline{xy} = \frac{1}{N} \cdot \sum_i x_i \cdot y_i, \overline{yX} = \frac{1}{N} \cdot \sum_i X_i \cdot y_i$$

ここで、 $N$ は特徴点数。(8)式より、 $M$ 、 $\cos \theta$ 、 $s$  ※【0040】  
 $\sin \theta$ は(9)式の様に決定される。 ※ 【数6】

$$A_c^2 + A_s^2 = M^2 \quad (8)$$

$$M = \sqrt{A_c^2 + A_s^2}, \cos \theta = \frac{A_c}{M}, \sin \theta = \frac{A_s}{M} \quad (9)$$

【0041】また、本来  $\cos \theta$ 、 $\sin \theta$ は、 $\cos^2 \theta + \sin^2 \theta = 1$ の関係があるため、対象画像に倍率変化が無いと仮定できる場合、(9)式の結果で、 $M=1.0$ とし、(10)式のような関係になった場合、(11)

8

\*可能になる。

【0037】そして補正パラメータ算出部37では、特徴点座標データ及び、対応点座標データから、画像A、B間の位置関係を決定する。求めるパラメータは(6)式の $\cos \theta$ 、 $\sin \theta$ 、 $s_x$ 、 $s_y$ 、 $M$ である。

【0038】

【数4】

$$\begin{pmatrix} x \\ y \end{pmatrix} = \begin{pmatrix} \cos \theta & -\sin \theta \\ \sin \theta & \cos \theta \end{pmatrix} \cdot \begin{pmatrix} M \cdot x \\ M \cdot y \end{pmatrix} + \begin{pmatrix} s_x \\ s_y \end{pmatrix} \quad (6)$$

ここで、 $(x, y)$ は特徴点位置、 $(X, Y)$ は対応点位置を示し、 $M$ は画像間の相対的な倍率に相当する。前記特徴点位置メモリ34、対応点位置メモリ36には、複数のデータが格納されているので、最小二乗的にパラメータを求めると、(7)式のようなになる。

【0039】

【数5】

式のように  $\cos \theta$ 、 $\sin \theta$ を補正したほうがよい。 $s_x$ 、 $s_y$ は補正した  $\cos \theta$ 、 $\sin \theta$ より計算する。

【0042】

【数7】

(6)

$$\cos^2 \theta + \sin^2 \theta = R^2 \quad (R \neq 1.0) \quad (10)$$

$$\cos \theta \rightarrow \frac{1}{R} \cdot \cos \theta, \quad \sin \theta \rightarrow \frac{1}{R} \cdot \sin \theta \quad (11)$$

【0043】前述した(6)～(9)式は、任意の原点を画像の回転中心としたが、設定・探索された特徴点・対応点位置それぞれの重心は一致すると考えても構わない。特徴点の重心位置は( $\bar{x}$ ,  $\bar{y}$ ) (ここで、 $\bar{\phantom{x}}$ は、平均を意味する記号として用いている。尚、各式のイメージ情報にあるように、各式中では、この平均はオ\*

\*オーバーバーとして表している)、対応点の重心位置は( $\bar{X}$ ,  $\bar{Y}$ )、で与えられ、 $\cos \theta$ ,  $\sin \theta$ ,  $s_x$ ,  $s_y$ はそれぞれ(12)、(13)式で与えられる。

【0044】

【数8】

$$\cos \theta = (\overline{xx} + \overline{yy}) / \sqrt{x^2 + y^2}$$

$$\sin \theta = (\overline{xy} - \overline{yx}) / \sqrt{x^2 + y^2} \quad (12)$$

$$\overline{x^2} = \frac{1}{N} \cdot \sum_i x_i^2, \quad \overline{y^2} = \frac{1}{N} \cdot \sum_i y_i^2$$

$$s_x = \bar{x} - \bar{X}$$

$$s_y = \bar{y} - \bar{Y}$$

(13)

【0045】以上説明したように、本実施形態は、画像中から特徴点を複数抽出し、自動的に位置あわせを行うため、業務用の高価な器材を用いることなく、一般ユーザーでもダイナミックレンジ拡大処理、被写界深度拡大処理の効果を最大限利用することができる。但し、処理の対象画像に歪曲収差が生じている場合には、任意の手法であらかじめ補正しておくことが必要となる。

【0046】次に、本発明による第2の実施形態について説明する。本実施形態は、前述した第1の実施形態と比較して、特徴点設定部33の内部の構成が異なるものである。

【0047】図5(a)は、特徴点設定部33の概念的な構成を示す図である。この構成は、図1に示した構成に比べて領域指定部81が加わっている点異なる。図5(b)は、領域指定部81の構成例を示す図である。この領域指定部81では、入力された画像データに対し、領域指示部83において、注目する領域を複数指示する。特徴点は、ここで指定された領域の内部に前述の方法で設定される。

【0048】この表示制御部84では、指定された領域(後述する領域位置メモリ85からのデータ)を、例えば、図6(a), (b)のように入力画像データ上にオーバーレイし、表示部82に、そのデータを表示する。この表示部82は、PCに付属のディスプレイでも構わないし、別に専用のものを設けても構わない。また領域指示部83は、PCに付属のマウスで指示しても構わないし、別に設けても構わない。前記表示制御部84は、領域指定部81の構成の一部として説明したが、パーソ

ナルコンピュータ等のオペレーティングシステム(OS)の機能を利用するような構成でも構わない。

【0049】さらに、領域指示部83では、画像中の座標で注目領域を指定しても構わない。そして領域位置メモリ85は、領域指示部83で指示された領域の位置・サイズを記憶し、領域分割部41に出力する。領域分割部41では、領域位置メモリ85からの領域位置情報をもとに、指示された領域内部に前記した方法で特徴点を設定する。

【0050】本実施形態の構成により、ユーザーが注目の部分の位置合わせ精度を上げことができると共に、あまり必要でない部分では特徴点探索を必要としないので、計算時間を短縮することができる。

【0051】また、人間や乗り物など、動く被写体が撮影画像に含まれた場合、動いた部分の画像を計算に用いると画像全体の位置合わせに誤差が生じるが、本実施例形態の構成では、そのような部分のデータを利用しないようにできる。

【0052】さらに、領域指示部83で指示した複数領域のうち特定の領域を指示し、その内部だけ他の領域より多く特徴点を設定することで、その特定領域の位置合わせ精度を更に向上することが可能である。

【0053】また、ダイナミックレンジ拡大技術の場合は露出値の順に、被写界深度拡大技術の場合には焦点位置の順に画像を整列し、隣り合う画像間で上記の操作を実行することで、ランダムに画像を選択して実行する場合に比べて精度を向上することができる。

【0054】図7は、本発明の第3の実施形態を示す図

(7)

11

である。図7に示した画像補正部30の構成は、図1に示した画像補正部30の構成に加えて、表示部82、表示制御部84、特徴点指示部90が含まれる。複数の特徴点位置は前述の方法で設定され、特徴点メモリ34に記憶される。

【0055】この特徴点メモリ34に記憶された特徴点座標は特徴点指示部90に送られ、表示制御部84を通して表示部82に対象画像上にその位置がオーバーレイされる（例えば、図3（b））

このとき、特徴点が人間・乗り物等動く被写体（移動物体）上に設定されていると、（6）～（10）式で計算する補正係数の誤差の原因となる。そこで、特徴点指示部90では、移動物体が含まれている場合は、その物体を検出し、移動物体上に設定された特徴点は計算に使うデータから除外し、特徴点メモリ34からデータを削除する。

【0056】この操作は、表示されたデータをユーザーが判断し、特徴点指示部90から除外するデータを示すようにしてもよい。また、対応点探索後、特徴点メモリ34と対応点メモリ36のデータを同時に表示部82に表示し、対応が取れていないとユーザーが判断した場合は、特徴点指示部90により、そのデータを除外することを指示できる用にしても構わない。

【0057】次に図8を参照して、本発明による第4の実施形態について説明する。この第4の実施形態は、図5の領域指定部81を図8に示すような構成に変更したものである。

【0058】図8に示される領域指定部81は、領域指示部83、領域位置メモリ85、状態判定部101から構成される。本実施形態では、画像の統計的・物理的な性質に基づいて特徴点設定領域に指定する範囲を決定する。

【0059】まず、画像全体を図9（a）のように予め決められた大きさに分割する。このとき分割するサイズは、特徴点設定部で切り出されるテンプレートより大きい範囲とする。

【0060】分割された各部分は状態判定部101に送られ、特徴点設定領域に指定するかどうかを判断する。状態判定部101では入力された画像データを走査し、飽和した画素が一定の割合を超えている場合は特徴点設定領域として適さないと判断する。

【0061】また、状態判定部101では、入力データの平均値がある閾値を超えている場合は、特徴点設定領域として適さないと判断しても構わない。領域指示部83は、図9（b）のように、分割した領域の画像データを順番に状態判定部101に出力し、特徴点設定領域として適していると判断された場合は、その範囲を含むように領域位置メモリ85に記録する。

【0062】前述した説明では、各分割領域ごとに判断したが、状態判定部に出力する画像データとして、領域

12

位置メモリ85に記録されている範囲全体にしても構わない。また、図9（c）に示したように、領域指示部83で、ユーザーがある分割領域を指定し、その周辺の領域から順番に特徴点指定領域に含んでいくようにしても良い。

【0063】さらに、図10に示すように、領域指示部83で、ユーザーがある1点を指定し、その周りに拡張した矩形を仮定し、その画像データを状態判定部101で判断するようにしてもよい。

【0064】また、飽和した画素値を判断基準に用いたが、状態判定部101では、入力した画像の離散フーリエ変換、離散コサイン変換といった直交変換を画像に施した時の高周波成分のパワーや、ウェーブレット変換の成分によって判断しても構わない。

【0065】さらに、状態判定部101では、入力されたデータのコントラストや画素値最大と最小の差を判断に用いても構わない。次に図11を参照して、本発明による第5の実施形態について説明する。

【0066】本実施形態は、3枚以上の画像が処理対象になっている例である。ここで、図示するうち、前述した図1と同等の構成部位には、同じ参照符号を付してその説明を省略する。

【0067】本実施形態において、画像データ再生部31で再生された画像データは、画像選択指示部114の指示により切替動作する画像切替部111によっていずれかのフレームメモリ32a、32bに入力される。この画像選択指示部114は、入力された同一被写体が撮影された複数の画像を順次処理できるように装置の処理時間等を見計らって、2つのフレームメモリに対して交互に入力されるように画像切替部111を制御するものである。

【0068】前記フレームメモリ32a、32bに格納された画像から前述した方法で特徴点・対応点を検出し、補正パラメータ算出部37で画像間の位置関係（平行移動量・回転角度・相対倍率）を算出する。補正パラメータ算出部37で算出されたパラメータは、画像ID、参照画像IDと共に補正パラメータ記憶部113に記憶される。

【0069】前記補正パラメータ変換部112は、補正パラメータ記憶部113に記憶されたデータを読み出し、それぞれのデータを予め指定された補正の基準となる画像からみた平行移動量・回転角度に変換する。続いて、補間演算部38では、補正パラメータ変換部112で補正基準画像からみたパラメータに従って画像を補正する。

【0070】ここで補正パラメータ変換部112でのデータ変換及び補間演算部38での補正は、画像切替部111の操作毎に行っても構わないし、対象画像全てについて相対的な位置関係を算出した後、改めてフレームメモリ32に画像を読み込んで行っても構わない。

(8)

13

【0071】また、本実施形態ではフレームメモリ 32 を 2 つとし、信号切替部 111 により入力画像を切り替えるように説明したが、対象画像全てを格納できる数のフレームメモリを用意しても構わない。

【0072】以上の実施形態について説明したが、本明細書には以下のような発明も含まれている。

(1) 撮影条件の異なる複数の画像において、画像を複数の分割領域に分割し、前記分割領域中におおのの分割領域と同じまたは小さい特徴点探索領域を設け、それぞれの特徴点探索領域から画像の統計量に基づいて被写体の特徴的な位置情報を抽出し、前記複数の画像のうち、被写体の特徴的な位置情報を抽出した画像とは異なる画像中で対応する点を探索し、前記特徴的な位置情報及び対応する点の位置情報より補正パラメータ（画像間の回転・移動・倍率変化等）を検出し、前記補正パラメータとしての画像間の回転・移動・倍率変化に基づいて画像を補正する画像処理装置。

【0073】本発明は、第 1 の実施形態に対応する。これにより、複数の画像を重ねる際に、より正確な画像の重ね合わせを行うことができるようになる。

(2) 前記 (1) 項に記載の画像処理装置において、前記回転・移動・倍率変化に基づいて画像を補正する際に特定の基準画像から見た回転・移動・倍率変化を表わすようにパラメータを変換してから補正することを特徴とする。

【0074】本発明は第 5 の実施形態に対応する。これにより、複数の画像を重ねる際に、それぞれの画像に対して適当な任意の補正パラメータを設定でき、撮影者の意図に応じた、より正確な画像の重ね合わせを行うことができるようになる。

(3) 前記複数の分割領域について、分割する領域を画像の一部に制限することを特徴とする 1 に記載の画像処理装置。

【0075】本発明は、第 2 の実施形態に対応する。これにより、複数の画像を重ねる際に、画像処理の速度が向上すると共に、それぞれの画像に対して適当な領域を設定でき、撮影者の意図に応じた、より正確な画像の重ね合わせを行うことができるようになる。

(4) 前記 (1) 項または (3) 項に記載の画像処理装置において、前記画像の統計量に基づく被写体の特徴的な位置情報のうち、複数の画像間で位置が移動している被写体上に設定された位置情報は画像間の回転・移動・倍率変化の検出に用いないことを特徴とする。

【0076】本発明は、第 3 の実施形態に対応する。これにより、複数の画像を重ねる際に、移動物体が存在する領域を排除しているので、より正確な画像の重ね合わせを行うことができるようになる。

(5) 前記 (3) 項に記載の画像処理装置において、分割する領域を画像の一部に制限する制限領域は、直交変換したときの高周波成分の割合、飽和した画素の割

14

合、画素値の平均値、最大及び最小の画素値の差、コントラストのいずれかの値を基準に制限されることを特徴とする。

【0077】本発明は、第 4 の実施形態に対応する。これにより、複数の画像を重ねる際に、画像処理の速度が向上すると共に、それぞれの画像に対して適当な領域を自動的に設定することができ、撮影者の意図に応じた、より正確な画像の重ね合わせを行うことができるようになる。

(6) 前記 (5) 項に記載の画像処理装置において、特定点を中心に制限領域を広げていくことを特徴とする。

【0078】本発明は第 4 の実施形態に対応する。これにより、複数の画像を重ねる際に、特定点を中心に、それぞれの画像に対して適当な領域を設定するので、より正確な画像の重ね合わせを行うことができるようになる。

【0079】

【発明の効果】以上詳述したように本発明によれば、露出や焦点位置など撮影条件が異なる複数の画像間の位置関係を検出し、検出した位置関係を示すパラメータの値によって、正確に画像が重なるように補正する画像処理装置を提供することができる。

【図面の簡単な説明】

【図 1】第 1 の実施形態としての画像処理装置の構成例を示す図である。

【図 2】図 1 に示した特徴点設定部の構成例を示す図である。

【図 3】図 3 (a) は、画像を複数の分割した分割領域と、各分割領域に設定された特徴点探索領域を示す図、図 3 (b) は、特徴点について説明するための図である。

【図 4】図 1 に示した対応点探索部の構成例を示す図である。

【図 5】図 5 (a) は、第 2 の実施形態としての画像処理装置の構成例を示す図、図 5 (b) は、領域指定部の構成例を示す図である。

【図 6】図 6 (a) は、画像上に表示された指定領域の一例を示す図、図 6 (b) は、画像上に表示された注目位置を示す図である。

【図 7】第 3 の実施形態としての画像処理装置の構成例を示す図である。

【図 8】第 4 実施形態としての画像処理装置に用いられる領域指定部の構成例を示す図である。

【図 9】図 9 (a) は、複数の分割領域に分割された入力画像を示す図、図 9 (b) は、走査による特徴点設定領域の指定について説明するための図、図 9 (c) は、拡張による特徴点設定領域の指定について説明するための図である。

【図 10】指定点から拡張した矩形を特徴点設定領域と



(9)

15

して指定することについて説明するための図である。

【図11】第5実施形態としての画像処理装置の構成例を示す図である。

【図12】従来の広ダイナミックレンジ画像を作成するための構成例を示す図である。

【図13】従来の深い被写界深度を有する画像を作成するための構成例を示す図である。

【符号の説明】

30…画像補正部

16

31…画像データ再生部

32…フレームメモリ

33…特徴点設定部

34…特徴点位置メモリ

35…対応点探索部


36…対応点位置メモリ

37…補正パラメータ算出部


38…補間演算部

39…画像合成部


【図1】

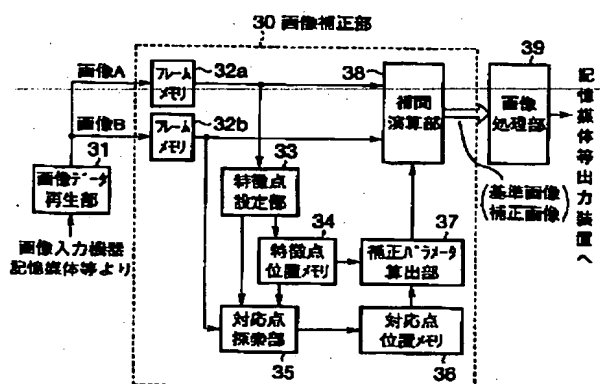


【図2】

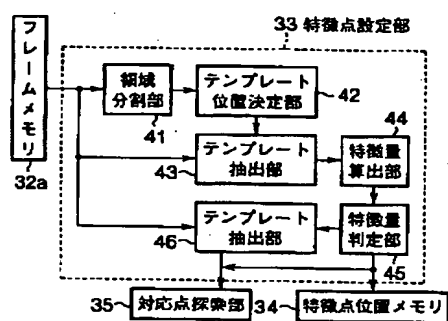


【図3】

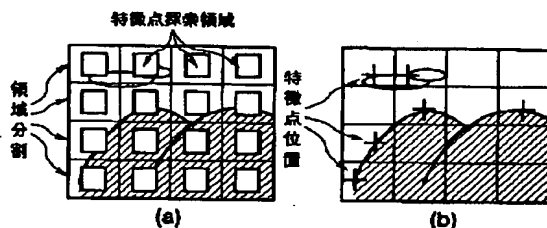


【図4】

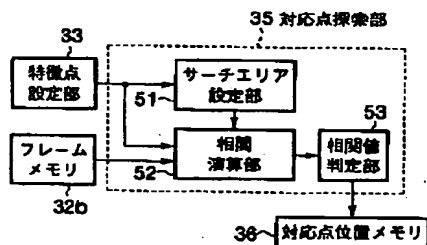

【図6】

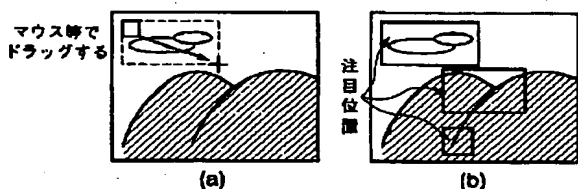


【図8】


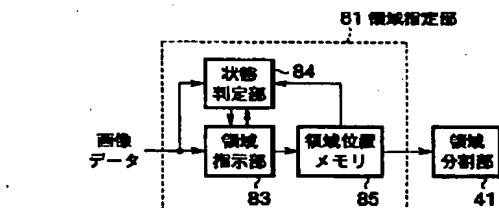


(10)


【図5】

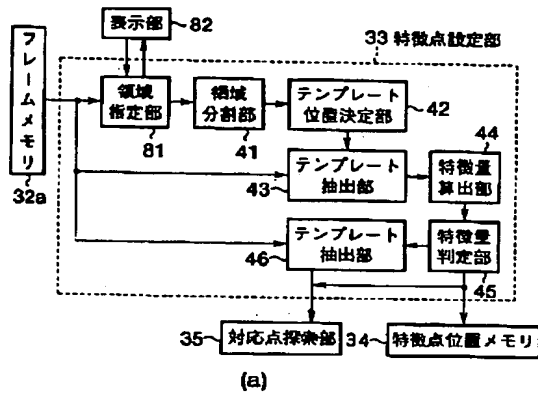


【図7】

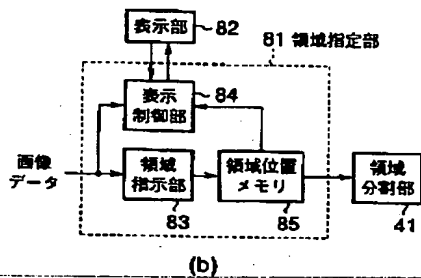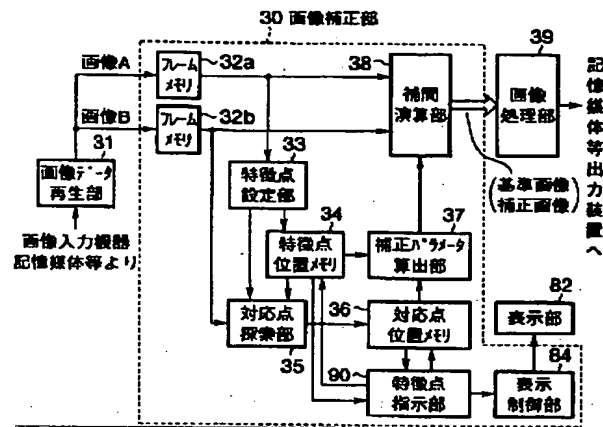


【図10】



【図9】

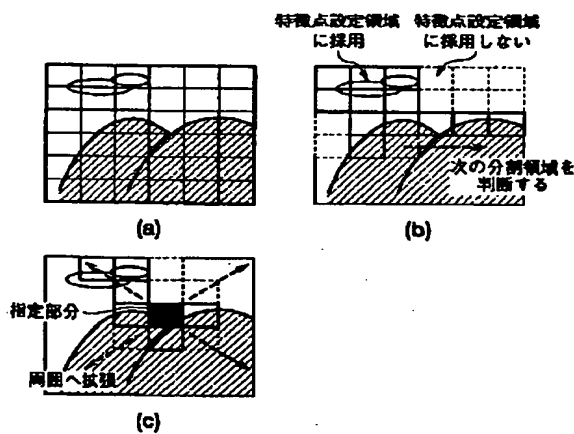


【図11】

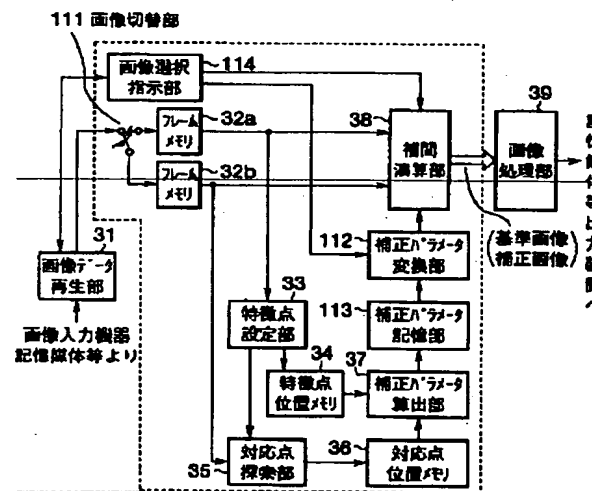


(11)

【図12】

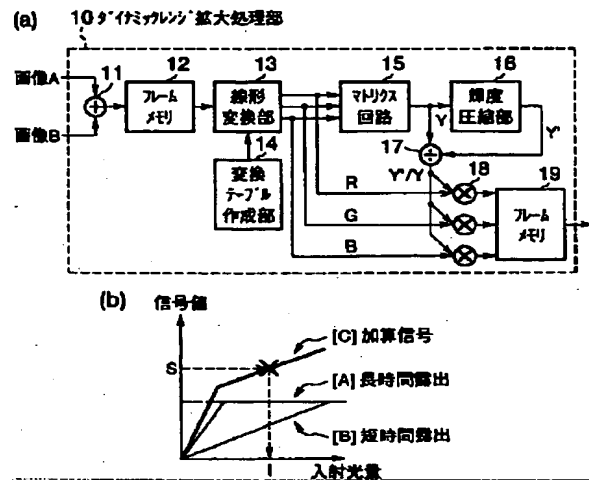

【図13】

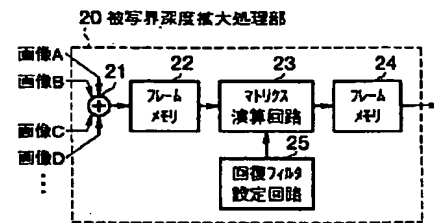

フロントページの続き

(51) Int. Cl. 6

識別記号

F I

G 0 6 F 15/70

3 5 0 B

**\* NOTICES \***

**Japan Patent Office is not responsible for any damages caused by the use of this translation.**

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

---

**CLAIMS**

---

[Claim(s)]

[Claim 1] In the image processing system which performs alignment processing between two or more images which photoed the almost same composition on different photography conditions A seek-area setting-out means to divide at least one image of the inputted image into two or more division fields, and to prepare the seek area of the focus showing the description of an image in said each division field, The 1st positional information extract means which the characteristic positional information of the photographic subject within said composition is related to the coordinate over each division field of said division image, and extracts it from the seek area of each of said focus based on the characteristic quantity of said image, with the 2nd positional information extract means extracted as positional information which said input images other than said divided image were alike, respectively, and it received [ positional information ], searched [ positional information ] for the point corresponding to said characteristic positional information, and related the acquired point of corresponding to the coordinate over the image An amendment parameter appearance means to detect the amendment parameter based on the gap between each coordinate of said extracted characteristic positional information and the positional information of said point of corresponding, The image processing system characterized by providing an image amendment means to amend an image so that the photographic subject location of each image may be in agreement, based on the detected amendment parameter.

[Claim 2] The positional information extracted by said 1st and 2nd positional information extract means is an image processing system according to claim 1 characterized by being the positional information which excepted the positional information relevant to the coordinate of the division field where the body which moves in the inside of said image was detected.

[Claim 3] The positional information extracted by said 1st and 2nd positional information extract means It is based on the value of the difference of the rate of a pixel that the high frequency component when carrying out orthogonal transformation was saturated comparatively, the average of a pixel value, and the greatest and minimum pixel value, and either of the contrast, to each division field in said image. The image processing system

according to claim 2 characterized by extracting the coordinate related positional information over a desired division field from said inputted image.

---

## DETAILED DESCRIPTION

---

### [Detailed Description of the Invention]

[0001]

[Field of the Invention] When this invention relates to the equipment which compounds the image beyond the dynamic range and depth of field of an input device from two or more images which photoed the same photographic subject on different photography conditions, especially piles up each image, it relates to the image processing system which performs alignment amendment so that a photographic subject may be in agreement.

[0002]

[Description of the Prior Art] The image processing technique (for example, JP,63-232591,A) which creates the image which has the dynamic range of the range more than the dynamic range of the proper of image sensors, such as CCD (Charge Coupled Device), by compounding two or more images which generally photoed the same photographic subject by different exposure, and two or more images which photoed the same photographic subject in a different focal location are compounded, and there is an image processing technique (JP,1-309478,A) which creates the image which has depth of field deeper than the depth of field of input optical system.

[0003] The technique which creates this extensive dynamic range image is realized with the configuration shown in drawing 12 (a). Image illustrated A and B are the images which changed and photoed exposure, respectively, and the relation between the amount of incident light which carries out incidence to an image sensor, and the signal value of the image obtained with an image input device becomes like "[A] long time exposure" of drawing 12 (b), and "[B] short-time exposure."

[0004] In an adder 11, the pixel value of Images A and B is added and the value shown in drawing 12 (b) as a "[C] addition signal" is memorized by the frame memory 12. The configuration of this "[C] addition signal" is determined by the exposure ratio of the image of two sheets. In the linear transform section 13, the amount I of incident light is presumed from the addition signal value S, and it changes into the luminance-signal value Y from the signal value of R, B, and G each color in the matrix circuit 15.

[0005] And in the brightness compression zone 16, a brightness value is compressed and compressed luminance-signal value Y' is outputted so that the amount of presumed incident light may be settled in the fixed number of gradation. R, G, and B which Y'/Y is calculated in a divider 17 and are the output of the linear transform section 16 — it is multiplied with each

signal and multiplier 18, and a result is stored in a frame memory 19.

[0006] Since this image processing technique uses two or more image data, compared with the case where tone curve processing of the short-time exposure image is only carried out, color reproduction is good and can obtain an image with few noises.

[0007] Moreover, the image processing technique which creates the image which has depth of field deeper than the depth of field of the input optical system mentioned above is realized with the configuration shown in drawing 13. First, weighting addition is carried out with an adder 21, and the image which changed the focal location and was photoed is memorized by the frame memory 22. If weighting addition of the image into which the focal location was changed is carried out according to a focal location, it is known that dotage of the whole image will be equalized.

[0008] So, in the recovery filter setting-out circuit 25, the recovery filter of the dotage in the image after addition is determined, and it outputs to the matrix arithmetic circuit 23. Here, since it is not a part in connection with the essence of this invention, the creation approach of a dotage recovery filter is omitted. In the matrix arithmetic circuit 23, a recovery filter is made to act on an addition image, and a result is stored in a frame memory 24. Consequently, the image stored in the frame memory 24 is an image with depth of field deeper than image pick-up optical system.

[0009]

[Problem(s) to be Solved by the Invention] Once the image processing technique mentioned above adds or added [ weighting ] the photoed image for every pixel, it was what performs dynamic range compression processing and a series of processings of recovery. Therefore, when the image set as the object of addition had caused the location gap to each other, it shifted, when it added and an exact result was not obtained.

[0010] Therefore, since destructive read was possible for the case of dynamic range amplification processing, while photoing the image by two or more exposure theoretically, as the firm stage used and called the need the device using the CMD (Charge Modulated Device) component which does not cause a location gap by depth of field amplification processing, expensive business-use equipment was needed. Moreover, when changing and photoing a focal location, change of the delicate scale factor for every focal location also influences.

[0011] With a digital camera which a general user uses, the scanner, and the tripod, what [ a thing ] that cannot expect precision simple occupies most to it compared with commercial equipment. Therefore, the advantage of an image processing technique mentioned above was not fully able to be employed efficiently.

[0012] For example, when a camera moves when carrying and photoing a digital camera to a tripod and pushing a shutter, or capturing the image photoed with the film-based camera by the film scanner, it is shifting mutually by the method of insertion of a film etc.

[0013] Then, this invention detects the physical relationship between two or more images with which photography conditions, such as exposure and a focal location, differ, and aims at offering the image processing system amended with the value of the parameter which shows the detected physical relationship so that an image may lap with accuracy.

[0014]

[Means for Solving the Problem] In the image processing system which performs alignment processing between two or more images which photoed the almost same composition (photography field) on different photography conditions in order that this invention might attain the above-mentioned object A seek-area setting-out means to divide at least one image of the inputted image into two or more division fields, and to prepare the seek area of the focus showing the description of an image in said each division field, The 1st positional information extract means which the characteristic positional information of the photographic subject within said composition is related to the coordinate over each division field of said division image, and extracts it from the seek area of each of said focus based on the characteristic quantity of said image, with the 2nd positional information extract means extracted as positional information which said input images other than said divided image were alike, respectively, and it received [ positional information ], searched [ positional information ] for the point corresponding to said characteristic positional information, and related the acquired point of corresponding to the coordinate over the image An amendment parameter appearance means to detect the amendment parameter based on the gap between each coordinate of said extracted characteristic positional information and the positional information of said point of corresponding, Based on the detected amendment parameter, an image processing system equipped with an image amendment means to amend an image so that the photographic subject location of each image may be in agreement is offered.

[0015] One in two or more inputted images is chosen, this image is divided into two or more fields, and the image processing system of the above configurations sets up the focus from the characteristic quantity of that division field, and memorizes the coordinate location of that focus. based on the coordinate of the focus , it search for the point of correspond , to each another input image which be chose , the coordinate location of the corresponding points be extract , the physical relationship between images ( the amount of parallel displacements , angle of rotation ) be compute from the coordinate and corresponding points coordinate of the focus , and after perform alignment amendment so that the image of one side or both may be amend and a photographic subject may agree , dynamic range compression processing , depth of field amplification processing , etc. be perform .

[0016]

[Embodiment of the Invention] Hereafter, the operation gestalt of this invention is explained to a detail with reference to a drawing. The example of a configuration of the image processing system as 1st operation gestalt by this invention is shown in drawing 1 , and it

explains to it.

[0017] In this operation gestalt, the image which is photoed with the image and film-based camera which were photoed with the digital camera which is not illustrated, and was photographed with the scanner etc. is recorded on storages, such as a hard disk, a portable floppy disk, and a memory card.

[0018] The image data playback section 31 which will read the image currently recorded on said hard disk and floppy disk, the memory card, etc., and will process expanding etc. if this operation gestalt is divided roughly, The image amendment section 30 which performs a interpolation operation and amends the physical relationship of the photographic subject of an image by the approach of mentioning later from the image data playback section 31 to an input image, It consists of the image composition sections 39 which perform dynamic range amplification mentioned above and depth of field amplification to the image with which physical relationship was amended by said image amendment section 30.

[0019] Moreover, the frame memory 32 said image amendment section 30 remembers temporarily the image data to which expanding processing was performed in the image data playback section 31 to be, The focus setting-out section 33 which sets up two or more focus (coordinate) later mentioned to one selected image, The corresponding-points retrieval section 35 which searches for the point of corresponding in another image from the image data of the focus circumference started as the focus location memory 34 which memorizes the focus coordinate, and a focus coordinate and a template, The corresponding-points location memory 36 which memorizes the obtained corresponding-points coordinate location, and the amendment parameter calculation section 37 which computes the physical relationship between the images of two sheets (the amount of parallel displacements, angle of rotation) from a focus coordinate and a corresponding-points coordinate, It consists of interpolation operation part 38 which amends the image of one side or both and is outputted to the image composition section 39 from the inputted physical relationship.

[0020] Thus, in the image-processing approach of this constituted operation gestalt, processing of expanding etc. is performed in the image data playback section 31, and the image by which reading appearance was carried out from said hard disk, memory card, etc. is memorized by the frame memory 32 of the image amendment section 30. Here, the data outputted from the image data playback section 31 shall contain not only the pixel value of an image but additional data, such as image size, the color number, and a color map.

[0021] Next, one in an input image is chosen (here, it considers as Image A), and it is inputted into the focus setting-out section 33. In this focus setting-out section 33, two or more focus (coordinate) by the approach of mentioning later is set up, and a focus coordinate is inputted into the focus location memory 34. The set-up focus coordinate is inputted also into the corresponding-points retrieval section 35, and simultaneously, the image data of the focus circumference is started as a template, and is inputted into the corresponding-points



retrieval section 35.

[0022] It is among an image other than the image inputted into the focus setting-out section 33 (here the image B), and the corresponding-points retrieval section 35 is searched for the point corresponding to the inputted template. The approach of searching for corresponding points is mentioned later.

[0023] Consequently, a corresponding-points coordinate location is outputted to the corresponding-points location memory 36. In the amendment parameter calculation section 37, the focus coordinate of the focus location memory 34 and the corresponding-points coordinate of the corresponding-points location memory 36 are read, and the physical relationship between the images of two sheets (the amount of parallel displacements, angle of rotation) is computed. And in the interpolation operation part 38, from the inputted physical relationship, the image of one side or both is amended and it outputs to the image composition section 39.

[0024] Although the dynamic range amplification processing and depth of field amplification processing which were mentioned above are performed in this image composition section 39, since the target image is an image with which location \*\*\*\*\* was performed in the image amendment section 30 of the preceding paragraph, the image naturally put on accuracy is obtained as a result image.

[0025] The configuration of said focus setting-out section 33 is shown in drawing 2, and it explains to it. In this focus setting-out section 33, although two or more focus locations are determined, when many focus concentrates on some images, the error of location \*\*\*\*\* may become large in the other part. So, in the field division section 41, in order to make it the focus suitably scattered in an image, an image is divided into two or more fields, and a focus seek area is further set as the interior. Here, the example which divided the whole uniformly is shown in drawing 3 (a).

[0026] The small region which serves as a candidate of a template all over this field is moved, and the location where characteristic quantity serves as max is outputted as one of the focus. However, since the processing time will start dramatically if it searches for the whole, it is desirable to set up a focus seek area smaller than the field divided like drawing 3 (a). The magnitude of this focus seek area is beforehand decided on the basis of image size like for example, 5% of image size. Or it does not matter on the basis of the magnitude of the divided small region.

[0027] Next, in the template fixing section 42, the template candidate location in a focus seek area is determined, and the image data in a template candidate is started in the template extract section 43 based on the location. At this time, a template candidate's location is moved in order within the description seek area in the template fixing section 42.

[0028] Since a characteristic quantity change of a template candidate near in location may not be not much large, in such a case, it is not that of \*\*\*\*\* the whole pixel, it can also shift

a template candidate's location at intervals of several pixels, and can reduce computational complexity as a result.

[0029] In the characteristic quantity calculation section 44, a template candidate's characteristic quantity is calculated and the template location where characteristic quantity serves as max in the characteristic quantity judging section 45 is determined. In the template extract section 46, the data around a location with which characteristic quantity became max are extracted as a template. As for this template extract section 46, the template extract section 43 may serve as that role. As this characteristic quantity, pixel value distribution as shown, for example in (1) type can be used.

[0030]

[Equation 1]

$$T = \sum_i |a_i - A| \quad (1)$$

Here,  $a_i$  is a pixel value,  $A$  is the pixel value average in a template candidate, and the sum is taken to the whole inside of a template candidate. Moreover, although a concrete formula does not mention, they are the secondary pixel value distribution and a value also with an edge detection result desirable as characteristic quantity. At this time, said value  $T$  is a degree type and [0031].

[Equation 2]

\*\* — like, when smaller than a certain default value  $T_{th}$ , it does not adopt noting that it is unreliable. For example, although the precision of matching which a pixel value change generally mentions later in a small part falls like the part of the empty in drawing 3 (b), by the approach of this invention, the focus is not set to a focus candidate location with a value  $T$  like (2) types, but precision lowering of a physical relationship parameter can be prevented.

[0032] Drawing 4 is drawing explaining the configuration of the corresponding-points retrieval section 35. In the search area setting-out section 51, the location and magnitude of a field which search for corresponding points are set up on the basis of the focus coordinate read from the focus setting-out section 33. In the correlation operation part 52, the image data of the perimeter of a corresponding-points candidate location is started from the image data in frame memory 32b so that it may have the same magnitude as the template inputted from the focus setting-out section 33 based on the information in the search area set up in the search area setting-out section 51, and a correlation value with the template data inputted from the focus setting-out section 33 is calculated.

[0033] In the correlation value judging section 53, the template and the location where correlation is the highest extracted in the template extract section 46 are judged, and it

outputs to the corresponding-points location memory 36 by making a result into a corresponding-points location.

[0034] Although a corresponding-points candidate generally moves for every pixel at this time and a correlation value is calculated, in order to detect a corresponding-points location in the precision below a pixel, with reference to a surrounding correlation value, interpolation may determine a corresponding-points location. As the correlation value, the absolute value sum of the difference shown in the following (3) types, the cross-correlation shown in (4) types, the normalization cross-correlation shown in (5) types can be used.

[0035]

[Equation 3]

Here,  $b_i$  and  $B$  are the pixel values and averages in the small region where it moves in the search area of Image B, and are  $\sigma_A$  and  $\sigma_B$ . It is the standard deviation of template data and is  $\sigma_A^2$  and  $\sigma_B^2$ . It becomes the variance.

[0036] If it calculates only about a certain representation color when calculating the aforementioned (2) - (4) type, it can process at a high speed. Moreover, if the correlation value of R, G, and B each color is added and it searches for corresponding points, it will become possible to carry out a response inspection funiculus to high degree of accuracy more.

[0037] And in the amendment parameter calculation section 37, the physical relationship between Images A and B is determined from focus coordinate data and corresponding-points coordinate data. The parameters for which it asks are  $\cos\theta$  of (6) types,  $\sin\theta$ , and  $s_x$ ,  $s_y$  and  $M$ .

[0038]

[Equation 4]

Here,  $(x, y)$  show  $X$ , a focus location and  $(Y)$  show a corresponding-points location, and  $M$  is equivalent to the relative scale factor between images. Since two or more data are stored in said focus location memory 34 and the corresponding-points location memory 36, if it asks for a parameter in least square, it will become like (7) types.

[0039]

[Equation 5]

Here,  $N$  is the number of the focus. (8) From a formula,  $M$ ,  $\cos\theta$ , and  $\sin\theta$  are determined like (9) types.

[0040]

[Equation 6]

[0041] moreover, original  $\cos\theta$ ,  $\sin\theta$ , and  $\cos^2\theta + \sin^2\theta$  the case where it was referred to as  $M=1.0$  and becomes relation like (10) types by the result of (9) types when it can be assumed that there is no scale-factor change in an object image, since there is relation of  $\theta=1$  -- (11) types -- like -- It is better to amend  $\cos\theta$  and  $\sin\theta$ .  $s_x$  and  $s_y$  were amended. It calculates from  $\cos\theta$  and  $\sin\theta$ .

[0042]

[Equation 7]

[0043] Although (6) - (9) type mentioned above made the zero of arbitration the center of rotation of an image, you may think that the center of gravity of setting out, and each focus and corresponding-points location which were searched is in agreement. The center-of-gravity location of the focus (it is here  $(\bar{x}, \bar{y})$  and  $\bar{\phantom{x}}$  is used as a notation meaning an average.) in addition, as it is in the image information of each type, in each type, this average is expressed as an exaggerated bar -- the center-of-gravity location of corresponding points --  $(\bar{X}$  and  $\bar{Y})$  -- it is come out and given --  $\cos\theta$ ,  $\sin\theta$ , and  $s_x$  and  $s_y$  are given by (12) and (13) formulas, respectively.

[0044]

[Equation 8]

[0045] As explained above, a general user can also do the maximum utilization of the effectiveness of dynamic range amplification processing and depth of field amplification processing, without using an expensive business-use equipment, in order for this operation gestalt to extract two or more focus out of an image and to perform location \*\*\*\*\* automatically. However, when distortion aberration has arisen in the object image of processing, it is necessary to amend beforehand by the technique of arbitration.

[0046] Next, the 2nd operation gestalt by this invention is explained. As compared with the 1st operation gestalt which mentioned this operation gestalt above, the configurations inside the focus setting-out section 33 differ.

[0047] Drawing 5 (a) is drawing showing the notional configuration of the focus setting-out section 33. It differs in that the block-definition section 81 is added compared with the configuration which showed this configuration to drawing 1. Drawing 5 (b) is drawing showing the example of a configuration of the block-definition section 81. In this block-definition section 81, two or more fields to observe are directed in the field directions section 83 to the inputted image data. The focus is set as the interior of the field specified here by the above-mentioned

approach.

[0048] In this display and control section 84, the specified field (data from the region memory 85 mentioned later) is overlaid on input image data, as shown in drawing 6 (a) and (b), and that data is displayed on a display 82. The display of attachment in PC is sufficient as this display 82, and it may prepare the thing of dedication independently. Moreover, the field directions section 83 may be directed with the mouse of attachment in PC, and may be prepared independently. Although said display and control section 84 was explained as a part of configuration of the block-definition section 81, the configuration that the function of operating systems (OS), such as a personal computer, is used is sufficient as it.

[0049] Furthermore, in the field directions section 83, an attention field may be specified with the coordinate in an image. And the region memory section 85 memorizes the location and size of the field directed in the field directions section 83, and outputs it to the field division section 41. In the field division section 41, the focus is set up based on the region information from the region memory section 85 by the approach described above inside the directed field.

[0050] Since focus retrieval is not needed in the part which is not not much required while raising the alignment precision of the part which a user wants to observe and making things by the configuration of this operation gestalt, computation time can be shortened.

[0051] Moreover, although an error will produce them in the alignment of the whole image if human being, a vehicle, etc. use the image of the part which moved for count when the photographic subject which moves is included in a photography image, it can avoid using the data of such a part with the configuration of this example gestalt.

[0052] Furthermore, it is possible to direct a specific field among two or more fields directed in the field directions section 83, and only for the interior to improve the alignment precision of the specific region further by setting up many focus from other fields.

[0053] Moreover, in the case of a dynamic range amplification technique, compared with the case where an image is chosen and performed at random, precision can be improved by performing the above-mentioned actuation in order of exposure value between the images which in the case of a depth of field amplification technique align and adjoin each other in an image in order of a focal location.

[0054] Drawing 7 is drawing showing the 3rd operation gestalt of this invention. In addition to the configuration of the image amendment section 30 which showed the configuration of the image amendment section 30 shown in drawing 7 to drawing 1, a display 82, a display and control section 84, and the focus directions section 90 are contained. Two or more focus locations are set up by the above-mentioned approach, and are memorized by the focus memory 34.

[0055] The focus coordinate memorized by this focus memory 34 is sent to the focus directions section 90, and that location is overlaid by the display 82 on an object image through a display and control section 84 (for example, drawing 3 (b)).

If the focus is set up on the photographic subject (migration body) with which human being, a vehicle, etc. move at this time, it will become the cause of the error of the correction factor calculated by (6) · (10) formula. So, in the focus directions section 90, when the migration body is contained, the body is detected, and the focus set up on the migration body is excepted from the data used for count, and deletes data from the focus memory 34.

[0056] A user judges the displayed data and this actuation may be made to \*\* the data excepted from the focus directions section 90. Moreover, the data of the focus memory 34 and the corresponding-points memory 36 are simultaneously displayed on a display 82 after corresponding-points retrieval, and when a user judges that the response cannot be taken, you may make to except the data into the business which can be directed by the focus directions section 90.

[0057] Next, with reference to drawing 8, the 4th operation gestalt by this invention is explained. This 4th operation gestalt is changed into a configuration as shows the block-definition section 81 of drawing 5 to drawing 8.

[0058] The block-definition section 81 shown in drawing 8 consists of the field directions section 83, region memory 85, and the condition judging section 101. With this operation gestalt, the range specified as a focus setting-out field based on the statistical and physical property of an image is determined.

[0059] First, the whole image is divided into the magnitude which was able to be beforehand decided like drawing 9 (a). Let size divided at this time be the larger range than the template started in the focus setting-out section.

[0060] It judges whether each divided part is sent to the condition judging section 101, and is specified as a focus setting-out field. In the condition judging section 101, the inputted image data is scanned, and when the saturated pixel is over the fixed rate, it is judged that it is not suitable as a focus setting-out field.

[0061] Moreover, in the condition judging section 101, when it is over the threshold with the average of input data, you may judge that it is not suitable as a focus setting-out field. The field directions section 83 outputs the image data of the divided field to the condition judging section 101 in order like drawing 9 (b), and when it is judged that it is suitable as a focus setting-out field, it records including the range on the region memory 85.

[0062] In the explanation mentioned above, although judged for every division field, you may make it the whole range currently recorded on the region memory 85 as image data outputted to the condition judging section. Moreover, a division field with a user is specified and you may make it contain to the focus appointed field in an order from the field of the circumference of it in the field directions section 83, as shown in drawing 9 (c).

[0063] Furthermore, one with a user is specified in the field directions section 83, and the rectangle extended to the surroundings of it is assumed and you may make it judge the image data in the condition judging section 101, as shown in drawing 10.

[0064] Moreover, although the saturated pixel value was used for the decision criterion, in the condition judging section 101, orthogonal transformation, such as discrete Fourier transform of the inputted image and a discrete cosine transform, may be judged by the power of the high frequency component when giving an image, and the component of wavelet transform.

[0065] Furthermore, in the condition judging section 101, the contrast of the inputted data, and pixel value max and the minimum difference may be used for decision. Next, with reference to drawing 11, the 5th operation gestalt by this invention is explained.

[0066] This operation gestalt is an example from which the image of three or more sheets is a processing object. Here, the same reference mark is given to a configuration part equivalent to drawing 1 mentioned above while illustrating, and the explanation is omitted to it.

[0067] In this operation gestalt, the image data reproduced in the image data playback section 31 is inputted into one of the frame memories 32a and 32b by the image change section 111 which carries out change-over actuation with directions of the image selection directions section 114. This image selection directions section 114 chooses the processing time of equipment etc. at its own discretion so that two or more images with which the inputted same photographic subject was photoed can be processed sequentially, and it controls the image change-over section 111 to be inputted by turns to two frame memories.

[0068] The focus and corresponding points are detected by the approach mentioned above from the image stored in said frame memories 32a and 32b, and the physical relationship between images (the amount of parallel displacements, angle of rotation, and relative magnification) is computed in the amendment parameter calculation section 37. The parameter computed in the amendment parameter calculation section 37 is memorized by the amendment parameter storage section 113 with Image ID and the reference image ID.

[0069] Said amendment parameter converter 112 reads the data memorized by the amendment parameter storage section 113, and changes them into the amount of parallel displacements and angle of rotation which saw each data from the image used as the criteria of the amendment specified beforehand. Then, in the interpolation operation part 38, the amendment parameter converter 112 amends an image according to the parameter seen from the correction-reference image.

[0070] Amendment by data conversion and the interpolation operation part 38 in the amendment parameter converter 112 may be performed for every actuation of the image change section 111, and after computing physical relationship relative about all object images, an image may be anew read into a frame memory 32 here.

[0071] Moreover, although this operation gestalt explained that a frame memory 32 was set to two and an input image was changed by the signal change section 111, a number of frame memories which can store all object images may be prepared.

[0072] Although the above operation gestalt was explained, the following invention is also included in this description.

(1) Divide an image into two or more division fields in two or more images with which photography conditions differ. Each division field and the same or small focus seek area are prepared all over said division field. Based on the statistic of an image, the characteristic positional information of a photographic subject is extracted from each focus seek area. It searches for the point of corresponding in a different image from the image which extracted the characteristic positional information of a photographic subject among said two or more images. The image processing system which detects amendment parameters (the revolution, migration, scale-factor change, etc. between images), and amends an image based on the revolution, migration, and scale-factor change between the images as said amendment parameter from said characteristic positional information and the corresponding positional information of a point.

[0073] This invention corresponds to the 1st operation gestalt. Thereby, in case two or more images are piled up, it can carry out by a more exact image making it pile each other up.

(2) It is characterized by amending in an image processing system given in the aforementioned (1) term, after changing a parameter so that the revolution, migration, and scale-factor change seen from the specific criteria image may be expressed in case an image is amended based on said revolution, migration, and scale-factor change.

[0074] This invention corresponds to the 5th operation gestalt. Thereby, in case two or more images are piled up, the amendment parameter of suitable arbitration can be set up to each image, and superposition of a more exact image according to an intention of a photography person can be performed.

(3) An image processing system given in 1 characterized by restricting the field to divide to some images about said two or more division fields.

[0075] This invention corresponds to the 2nd operation gestalt. In case two or more images are piled up, while the rate of an image processing improves by this, a suitable field can be set up to each image and superposition of a more exact image according to an intention of a photography person can be performed.

(4) It is characterized by not using for detection of the revolution, migration, and scale-factor change between images the positional information set up on the photographic subject which the location is moving among two or more images among the characteristic positional information of the photographic subject based on the statistic of said image in an image processing system given in the aforementioned (1) term or (3) terms.

[0076] This invention corresponds to the 3rd operation gestalt. Since the field where a migration body exists is eliminated by this in case two or more images are piled up, superposition of a more exact image can be performed.

(5) The limit field which restricts the field divided in an image processing system given in the aforementioned (3) term to some images is comparatively characterized by the thing of the pixel with which the high frequency component when carrying out orthogonal transformation



was saturated comparatively restricted on the basis of the value of the difference of the average of a pixel value, and the greatest and minimum pixel value, and either of the contrast.

[0077] This invention corresponds to the 4th operation gestalt. In case two or more images are piled up, while the rate of an image processing improves by this, a suitable field can be automatically set up to each image, and superposition of a more exact image according to an intention of a photography person can be performed.

(6) In an image processing system given in the aforementioned (5) term, it is characterized by extending a limit field focusing on a specifying point.

[0078] This invention corresponds to the 4th operation gestalt. Since a suitable field is set up to each image focusing on a specifying point by this in case two or more images are piled up, superposition of a more exact image can be performed.

[0079]

[Effect of the Invention] As explained in full detail above, according to this invention, the physical relationship between two or more images with which photography conditions, such as exposure and a focal location, differ can be detected, and the image processing system amended so that an image may lap with accuracy can be offered with the value of the parameter which shows the detected physical relationship.

---

## DESCRIPTION OF DRAWINGS

---

[Brief Description of the Drawings]

[Drawing 1] It is drawing showing the example of a configuration of the image processing system as 1st operation gestalt.

[Drawing 2] It is drawing showing the example of a configuration of the focus setting-out section shown in drawing 1 .

[Drawing 3] Drawing in which drawing 3 (a) shows the focus seek area set as two or more division fields where it divided, and each division field in the image, and drawing 3 (b) are drawings for explaining the focus.

[Drawing 4] It is drawing showing the example of a configuration of the corresponding-points retrieval section shown in drawing 1 .

[Drawing 5] Drawing in which drawing 5 (a) shows the example of a configuration of the image processing system as 2nd operation gestalt, and drawing 5 (b) are drawings showing the example of a configuration of the block-definition section.

[Drawing 6] Drawing showing an example of the appointed field where drawing 6 (a) was displayed on the image, and drawing 6 (b) are drawings showing the attention location displayed on the image.

[Drawing 7] It is drawing showing the example of a configuration of the image processing

system as 3rd operation gestalt.

[Drawing 8] It is drawing showing the example of a configuration of the block-definition section used for the image processing system as the 4th operation gestalt.

[Drawing 9] Drawing for drawing and drawing 9 (b) which show the input image with which drawing 9 (a) was divided into two or more division fields to explain assignment of the focus setting-out field by scan, and drawing 9 (c) are drawings for explaining assignment of the focus setting-out field by escape.

[Drawing 10] It is drawing for explaining specifying the rectangle extended from the specifying point as a focus setting-out field.

[Drawing 11] It is drawing showing the example of a configuration of the image processing system as the 5th operation gestalt.

[Drawing 12] It is drawing showing the example of a configuration for creating the conventional extensive dynamic range image.

[Drawing 13] It is drawing showing the example of a configuration for creating the image which has the conventional deep depth of field.

[Description of Notations]

- 30 -- Image amendment section
- 31 -- Image data playback section
- 32 -- Frame memory
- 33 -- Focus setting-out section
- 34 -- Focus location memory
- 35 -- Corresponding-points retrieval section
- 36 -- Corresponding-points location memory
- 37 -- Amendment parameter calculation section
- 38 -- Interpolation operation part
- 39 -- Image composition section

---

[Translation done.]